


NO.	ECN NO.	DESCRIPTION	DATE
1	A.1	①针头行程1.5改外1.4 ②长度由3.8改为3.9	2020.5.21
2	A.2	针头外径由0.6改回0.8 针头行程1.4改为1.5,长度由3.9改为4.0	2020.11.21

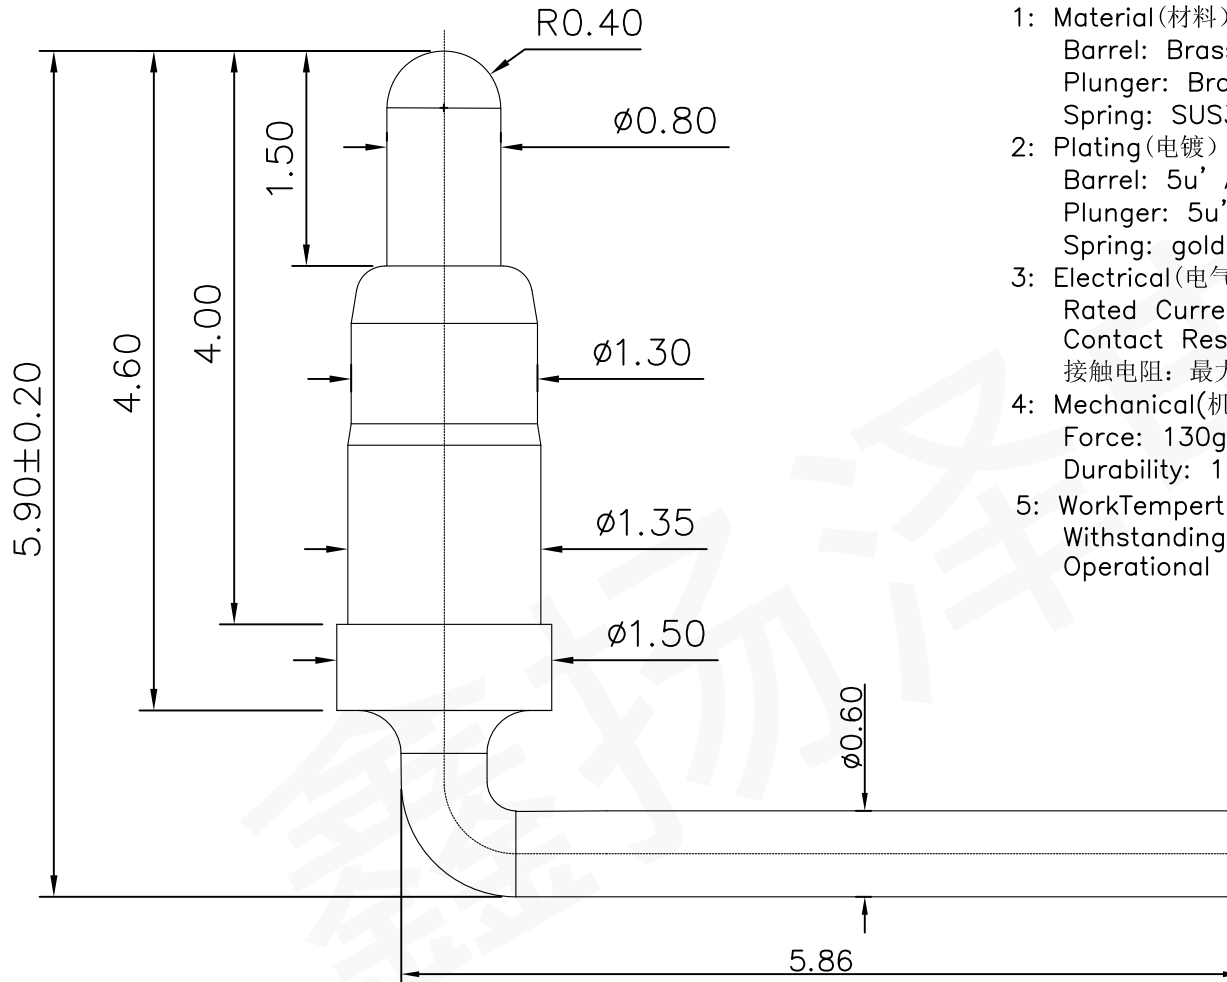

Note:

1: Material(材料):

Barrel: Brass C3604 (针管: 黄铜 C3604)
 Plunger: Brass C3604 (针头: 黄铜 C3604)
 Spring: SUS304 (弹簧: SUS304)

2: Plating(电镀):

Barrel: 5u' Au over 50~80u' Ni(针管: 镀金5u', 镍底50~80u'.)
 Plunger: 5u' Au over 50~80u' Ni(针头: 镀金5u', 镍底50~80u'.)
 Spring: gold plated (弹簧: 镀金)

3: Electrical(电气特性):

Rated Current & Voltage: DC 12V;1A (额定电压&电流: 直流12V,1A)
 Contact Resistance: 50 mohm Max. at working height.
 接触电阻: 最大50毫欧(在工作高度状态下)

4: Mechanical(机械性能):

Force: 130g ± 20% at working height. (130g ± 20%在工作高度)。
 Durability: 10,000 cycles (min) (寿命: 10000次)

5: WorkTemperture(工作环境):

Withstanding Higt Temperature: 280℃
 Operational Temperature: ?40℃~ ?85℃

深圳市鑫扬泽电子有限公司



HTTP://WWW.XYZPOGOPIN.COM
 TEL:0755-28773277 FAX:0755-28891353

SCALE:	N/A	UNIT	mm
SHEET:	1 of 1	PROJECTION	
DATE:	2020.11.21	VER.	A.2

THE UNMARKED TOLERANCE ARE AS BELOW:

LENGTH		ANGLE	
X.XX	±0.05mm	X.XX	±0.50°
X.X	±0.10mm	X.X	±1.00°
X.	±0.20mm	X.	±2.00°

DESIGNED BY:	shuai	DWG. NO.	YZB0013-15059
CHECKED BY:		TITLE:	Pogo pin连接器
APPROVED BY:			