


客户图

NO.	ECN NO.	DESCRIPTION	DATE
1			

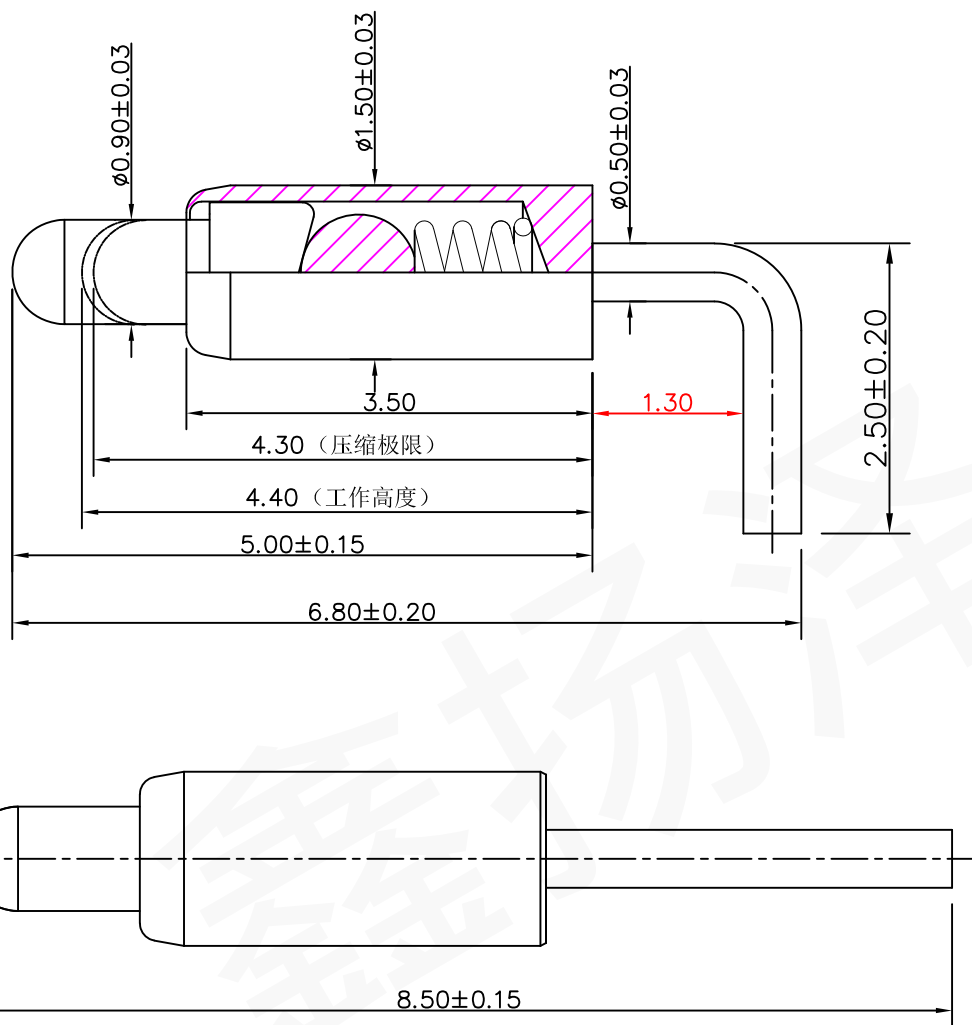

Note:

- Material (材料):
 - Housing: PA46+30%GF (胶芯: PA46)
 - Barrel: Brass C3604 (针管: 黄铜 C3602 铆料)
 - Plunger: Brass C3604 (针头: 黄铜 C3604)
 - Spring: SUS304 (弹簧: SUS304)
 - ball bearing: SUS 304 (钢珠: 不锈钢 304)
- Plating (电镀):
 - Barrel: 3u' Au over 50~80u' Ni (针管: 镀金3u', 镍底50~80u'.)
 - Plunger: 3u' Au over 50~80u' Ni (针头: 镀金3u', 镍底50~80u'.)
 - Spring: No plated (弹簧: 不电镀)
 - ball bearing: 2u' Au over 50~80u' Ni (钢珠: 镀金2u', 镍底50~80u'.)
- Electrical (电气特性):
 - Rated Current & Voltage: DC 12V; 4A (额定电压&电流: 直流12V, 4A)
 - Contact Resistance: 50 mohm Max. at working height. (接触电阻: 最大50毫欧 (在工作高度状态下))
 - Insulation Resistance: 1,000M Ω minimum. (绝缘电阻: 1,000M Ω 以上)
 - Dielectric Withstand Voltage: 500VAC/minute. (抗击电压: 500VAC/minute)
- Mechanical (机械性能):
 - Force: 50g \pm 20% at working height. (50g \pm 20% 在工作高度)。
 - Durability: 10,000 cycles (min) (寿命: 10000次)
- WorkTemperature (工作环境):
 - Withstanding Higt Temperature: 280 $^{\circ}$ C
 - Operational Temperature: -40 $^{\circ}$ C ~ +85 $^{\circ}$ C

深圳市鑫扬泽电子有限公司



HTTP://WWW.XYZPOGOPIN.COM
TEL: 0755-28773277 FAX: 0755-28891353

SCALE:	N/A	UNIT	mm
SHEET:	1 of 1	PROJECTION	
DATE:	2017.09.04	VER.	D.0

THE UNMARKED TOLERANCE ARE AS BELOW :			
LENGTH		ANGLE	
X.XX	± 0.05 mm	X.XX	$\pm 0.50^{\circ}$
X.X	± 0.10 mm	X.X	$\pm 1.00^{\circ}$
X.	± 0.20 mm	X.	$\pm 2.00^{\circ}$

DESIGNED BY:		DWG. NO.	YZB0027-15068
CHECKED BY:		TITLE:	Pogo pin
APPROVED BY:			