


1 2 3 4 5 6 7 8 9 10 11 12

NO.	ECN NO.	DESCRIPTION	DATE

客户图

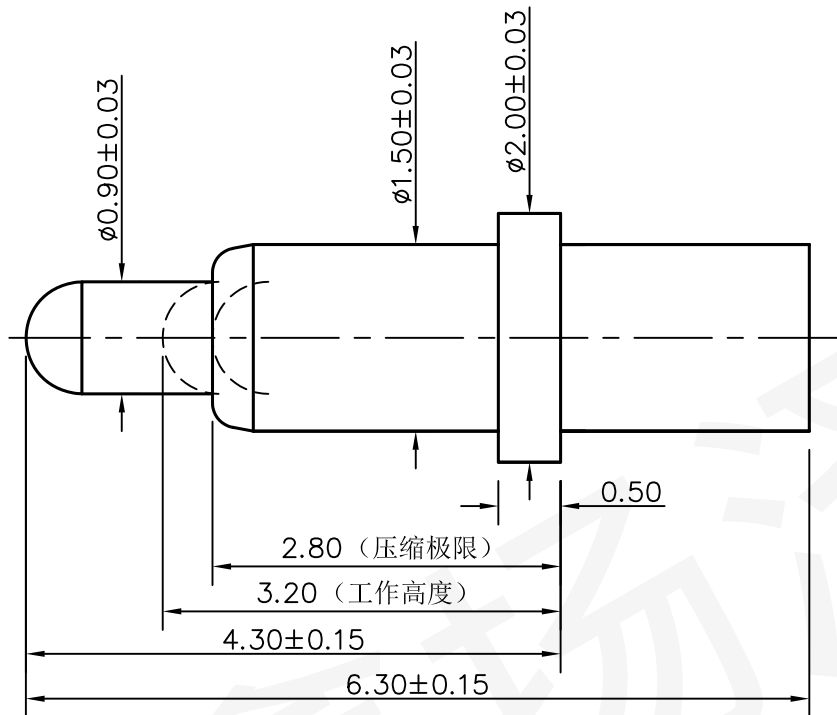

Note:

- Material (材料):
  - Barrel: Brass C3604 (针管: 黄铜 C3604)
  - Plunger: Brass C3604 (针头: 黄铜 C3604)
  - Spring: SUS304 (弹簧: SUS304)
- Plating (电镀):
  - Barrel: 3u' Au over 50~80u' Ni (针管: 镀金3u', 镍底50~80u'.)
  - Plunger: 3u' Au over 50~80u' Ni (针头: 镀金3u', 镍底50~80u'.)
  - Spring: No plated (弹簧: 不电镀)
- Electrical (电气特性):
  - Rated Current & Voltage: DC 12V;1A (额定电压&电流: 直流12V,1A)
  - Contact Resistance: 50 mohm Max. at working height.
  - 接触电阻: 最大50毫欧 (在工作高度状态下)
- Mechanical (机械性能):
  - Force: 120g $\pm$ 20% at working height. (120g $\pm$ 20% 在工作高度时)。
  - Durability: 10.000 cycles (min) (寿命: 10000次)
- Work Temperature (工作环境):
  - Withstanding Higt Temperature: 280 $^{\circ}$ C
  - Operational Temperature: - 40 $^{\circ}$ C ~ + 85 $^{\circ}$ C

深圳市鑫扬泽电子有限公司



HTTP://WWW.XYZPOGOPIN.COM  
TEL:0755-28773277 FAX:0755-28891353

SCALE:	N/A	UNIT	mm
SHEET:	1 of 1	PROJECTION	
DATE:	2017.12.25	VER.	A.0

THE UNMARKED TOLERANCE ARE AS BELOW :

LENGTH		ANGLE	
X.XX	$\pm 0.05$ mm	X.XX	$\pm 0.50^{\circ}$
X.X	$\pm 0.10$ mm	X.X	$\pm 1.00^{\circ}$
X.	$\pm 0.20$ mm	X.	$\pm 2.00^{\circ}$

DESIGNED BY:		DWG. NO.	YZ197515063P
CHECKED BY:		TITLE:	Pogo pin连接器
APPROVED BY:			

1 2 3 4 5 6 7 8 9 10 11 12