


NO.	ECN NO.	DESCRIPTION	DATE

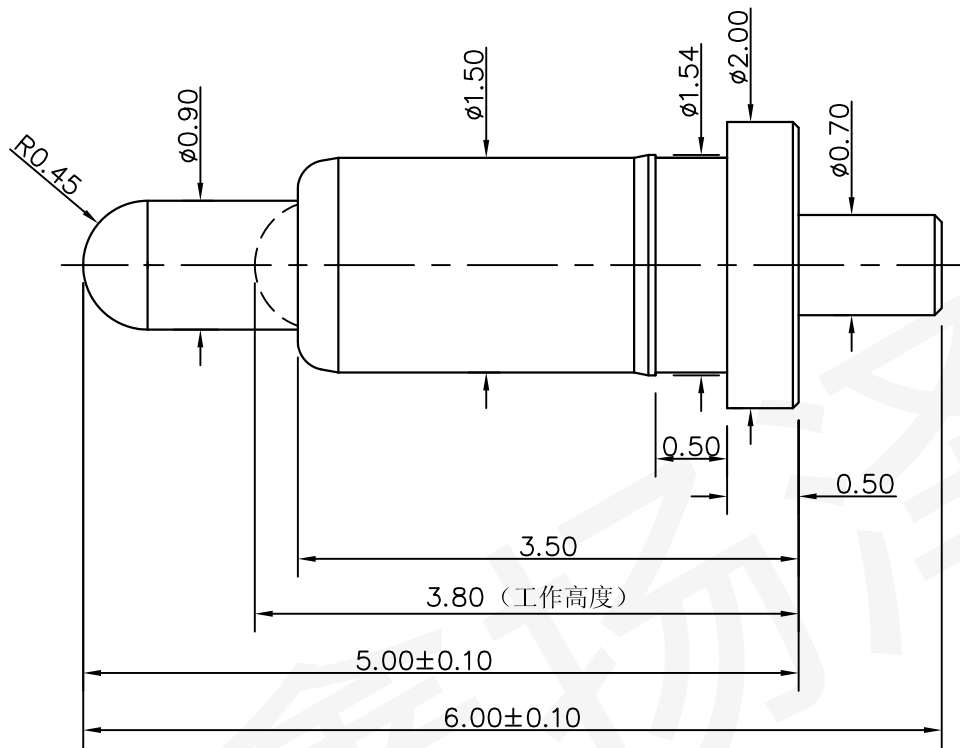

Note:

- Material(材料):
  - Barrel: Brass C3604 (针管: 黄铜 C3604)
  - Plunger: Brass C3604 (针头: 黄铜 C3604)
  - Spring: SUS304 (弹簧: SUS304)
- Plating(电镀):
  - Barrel: 1u' Au over 50~80u' Ni (针管: 镀金1u', 镍底50~80u')
  - Plunger: 1u' Au over 50~80u' Ni (针头: 镀金1u', 镍底50~80u')
  - Spring: No plated (弹簧: 不电镀)
- Electrical(电气特性):
  - Rated Current & Voltage: DC 12V; 1A (额定电压&电流: 直流12V, 1A)
  - Contact Resistance: 100 mohm Max. at working height. (接触电阻: 最大100毫欧 (在工作高度状态下))
- Mechanical(机械性能):
  - Force: 120g ± 20% at working height. (120g ± 20% 在工作高度)。
  - Full stroke: 1.50mm (全行程: 1.50mm)
  - Durability: 10,000 cycles (min) (寿命: 10000次)
- Work Temperature(工作环境):
  - Withstanding Hight Temperature: 280°C
  - Operational Temperature: - 20°C ~ + 70°C

深圳市鑫扬泽电子有限公司



HTTP://WWW.XYZPOGOPIN.COM  
TEL: 0755-28773277 FAX: 0755-28891353

SCALE:	N/A	UNIT	mm
SHEET:	1 of 1	PROJECTION	
DATE:	2013.06.01	VER.	D.0

THE UNMARKED TOLERANCE ARE AS BELOW :			
LENGTH		ANGLE	
X.XX	±0.05mm	X.XX	±0.50°
X.X	±0.10mm	X.X	±1.00°
X.	±0.20mm	X.	±2.00°

DESIGNED BY:		DWG. NO.	YZ29115060P
CHECKED BY:		TITLE:	Pogo pin连接器
APPROVED BY:			