


NO.	ECN NO.	DESCRIPTION	DATE

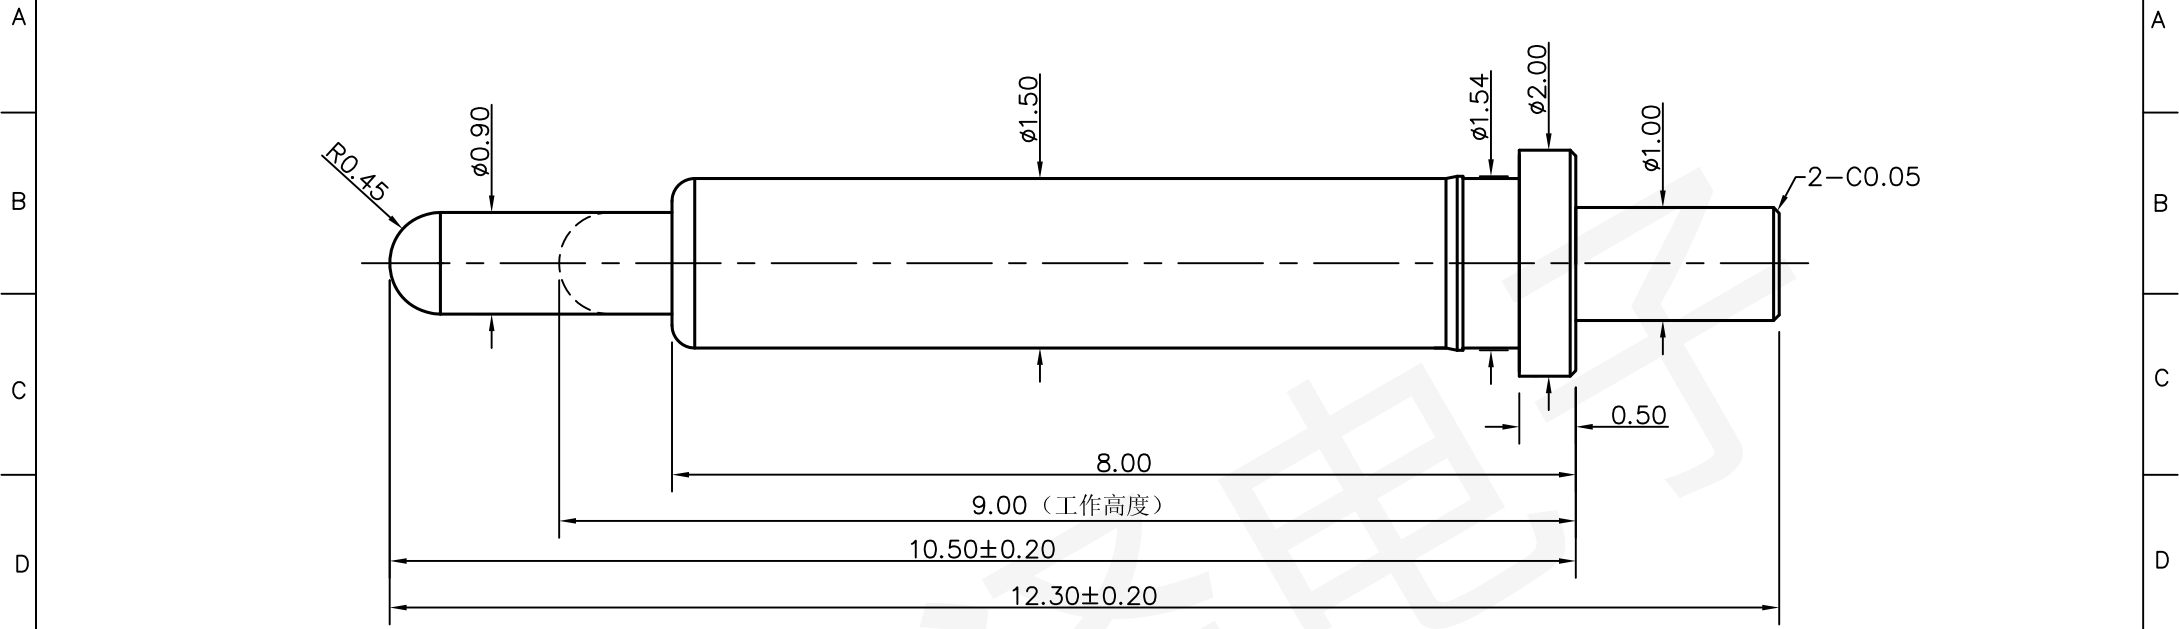

Note:

- Material (材料):**
 Barrel: Brass C3604 (针管: 黄铜 C3604)
 Plunger: Brass C3604 (针头: 黄铜 C3604)
 Spring: SUS304 (弹簧: SUS304)
- Plating (电镀):**
 Barrel: 1u' Au over 50~80u' Ni (针管: 镀金1u', 镍底50~80u'.)
 Plunger: 1u' Au over 50~80u' Ni (针头: 镀金1u', 镍底50~80u'.)
 Spring: No plated (弹簧: 不电镀)
- Electrical (电气特性):**
 Rated Current & Voltage: DC 12V;1A (额定电压&电流: 直流12V,1A)
 Contact Resistance: 50 mohm Max. at working height.
 接触电阻: 最大50毫欧 (在工作高度状态下)
- Mechanical (机械性能):**
 Force: 100g±20% at working height. (100g±20%在工作高度).
 Full stroke: 2.00mm (全行程: 2.00mm)
 Durability: 10,000 cycles(min) (寿命: 10000次)
- WorkTemperture (工作环境):**
 Withstanding Higt Temperature: 280℃
 Operational Temperature: - 20℃~ + 70℃

深圳市鑫扬泽电子有限公司 HTTP://WWW.XYZPOGOPIN.COM TEL:0755-28773277 FAX:0755-28891353		SCALE: N/A	UNIT: mm	THE UNMARKED TOLERANCE ARE AS BELOW :		DESIGNED BY:	DWG. NO. YZ38115123P	
		SHEET: 1 of 1	PROJECTION:	LENGTH: X.XX ±0.05mm, X.X ±0.10mm, X. ±0.20mm		ANGLE: X.XX ±0.50°, X.X ±1.00°, X. ±2.00°	CHECKED BY:	TITLE: Pogo pin连接器
		DATE: 2013.08.14	VER.:	D.O			APPROVED BY:	