


客户图

NO.	ECN NO.	DESCRIPTION	DATE

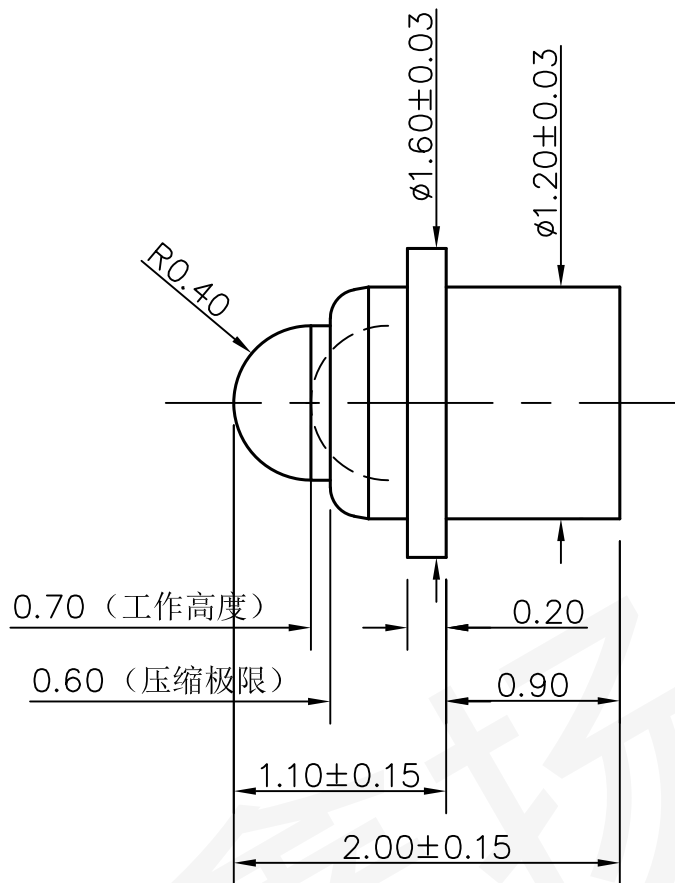

Note:

- Material (材料):
 - Barrel: Brass C3604 (针管: 黄铜 C3604)
 - Plunger: Brass C3604 (针头: 黄铜 C3604)
 - Spring: SUS304 (弹簧: SUS304)
- Plating (电镀):
 - Barrel: 5u' Au over 50~80u' Ni (针管: 镀金5u', 镍底50~80u'.)
 - Plunger: 5u' Au over 50~80u' Ni (针头: 镀金5u', 镍底50~80u'.)
 - Spring: flash plated (弹簧: 镀金)
- Electrical (电气特性):
 - Rated Current & Voltage: DC 12V;1A (额定电压&电流: 直流12V,1A)
 - Contact Resistance: 50 mohm Max. at working height. (接触电阻: 最大50毫欧 (在工作高度状态下))
- Mechanical (机械性能):
 - Force: 30g \pm 20% at working height. (30g \pm 20%在工作高度)。
 - Durability: 10,000 cycles(min) (寿命: 10000次)
- Work Temperature (工作环境):
 - Withstanding Higt Temperature: 280°C
 - Operational Temperature: -40°C ~ +85°C

深圳市鑫扬泽电子有限公司



HTTP://WWW.XYZPOGOPIN.COM
TEL:0755-28773277 FAX:0755-28891353

SCALE:	N/A	UNIT	mm
SHEET:	1 of 1	PROJECTION	
DATE:	2019.05.20	VER.	D.0

THE UNMARKED TOLERANCE ARE AS BELOW :

LENGTH		ANGLE	
X.XX	± 0.05 mm	X.XX	$\pm 0.50^\circ$
X.X	± 0.10 mm	X.X	$\pm 1.00^\circ$
X.	± 0.20 mm	X.	$\pm 2.00^\circ$

DESIGNED BY:	lyg	DWG. NO.	YZP0120-16020
CHECKED BY:		TITLE:	Pogo pin连接器
APPROVED BY:			