


1 2 3 4 5 6 7 8 9 10 11 12

NO.	ECN NO.	DESCRIPTION	DATE

客户图纸

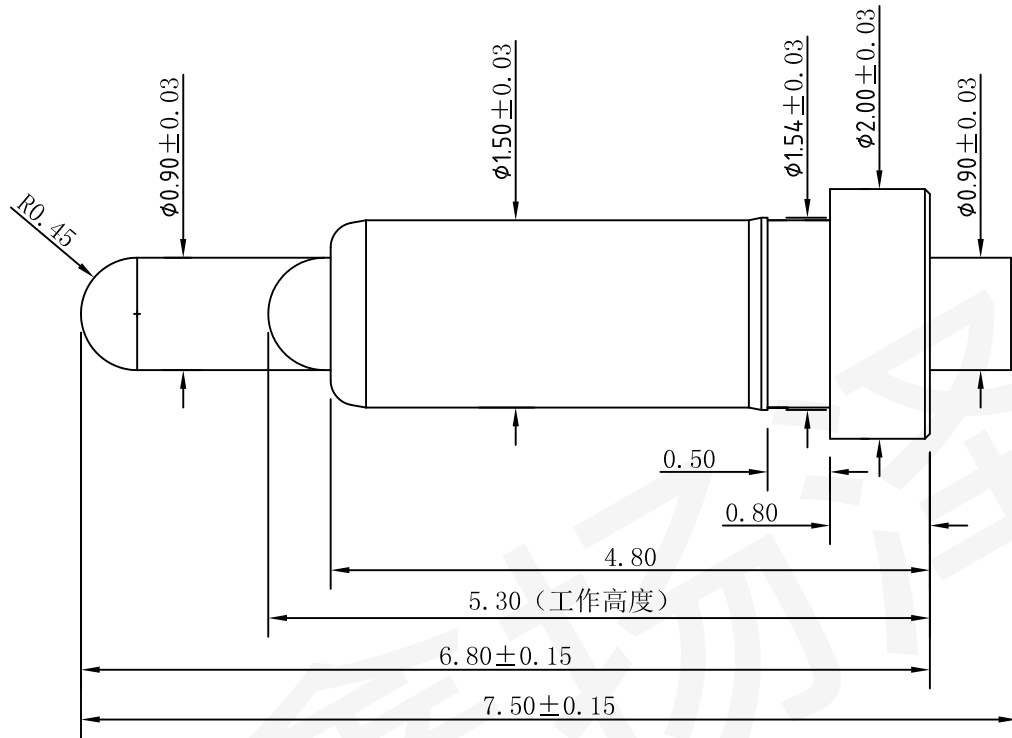

Note:

1: Material (材料):

Barrel: Brass C3604 (针管: 黄铜 C3604)

Plunger: Brass C3604 (针头: 黄铜 C3604)

Spring: SUS304 (弹簧: SUS304)

2: Plating (电镀):

Barrel: 3u' Au over 50~80' u Ni (针管: 镀金3u', 镍底50~80u')

Plunger: 3u' Au over 50~80' u Ni (针头: 镀金3u', 镍底50~80u')

Spring: No plated (弹簧: 不电镀)

3: Electrical (电气特性):

Rated Current & Voltage: DC 12V; 1A (额定电压&电流: 直流12V, 1A)

Contact Resistance: 100 mohm Max. at working height.

接触电阻: 最大100毫欧 (在工作高度状态下)

4: Mechanical (机械性能):

Force: 30g \pm 20% at working height. (30g \pm 20% 在工作高度)。

Full stroke: 2.00mm (全行程: 2.00mm)

Durability: 10,000 cycles (min) (寿命: 10000次)

5: Work Temperature (工作环境):

Withstanding Higt Temperature: 280°C

Operational Temperature: -20°C ~ +70°C

深圳市鑫扬泽电子有限公司



HTTP://WWW.XYZPOGOPIN.COM

TEL: 0755-28773277 FAX: 0755-28891353

SCALE:	N/A	UNIT	mm
SHEET:	1 of 1	PROJECTION	
DATE:	2014.02.17	VER.	D.0

THE UNMARKED TOLERANCE ARE AS BELOW:

LENGTH		ANGLE	
X.XX	± 0.05 mm	X.XX	$\pm 0.50^\circ$
X.X	± 0.10 mm	X.X	$\pm 1.00^\circ$
X.	± 0.20 mm	X.	$\pm 2.00^\circ$

DESIGNED BY:		DWG. NO.	YZP0380-20075
CHECKED BY:		TITLE:	Pogo pin连接器
APPROVED BY:			

1 2 3 4 5 6 7 8 9 10 11 12